

CPCD20/25/30/35
/40/45/50

让世界更合力
EMPOWER THE WORLD



ANHUI HELI CO., LTD.
/ 668
Add / No.668, FangXing Road, Hefei, China
(Post Code) / 230000
(Customer Service Hotline) / 4001-600761
(Service Tel) / +86-551-63689000,63648005





R 2-5t

10°/12°

HELI



2-3.5t:18-19km/h
2-3.5t:23-24km/h
4-5t:28-30km/h



2-3.5t:60%
4-5t:40%



2-3.5t 510mm/s
4-5t:500mm/s




2-3.5t 560mm/s
4-5t 550mm/s


80°

80°

2-3.5t 3 3 2 1 4-5t 3 1

+



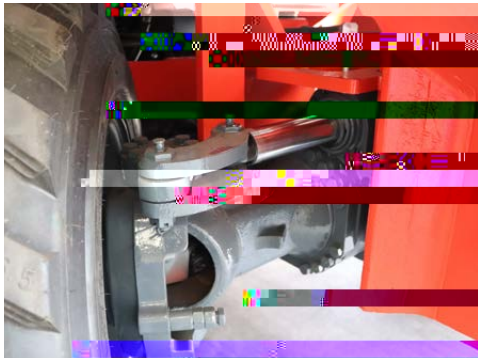

2-3.5t 4-5t

2-3.5t
4-5t



LED





IP65




- +
-
-
- USB ;
-
-
-



-
-
-

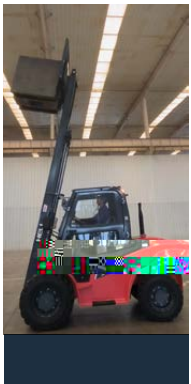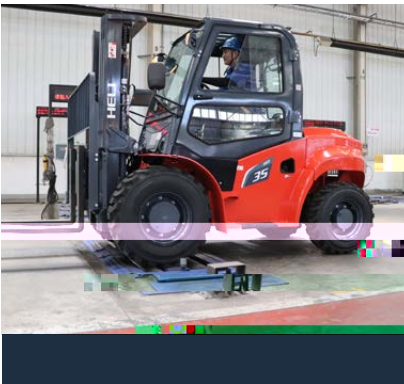

				HELI				
				CPCD20-KU5Y4R-2	CPCD25-KU5Y4R-2	CPCD30-KU5Y4R-2	CPCD35-KU5Y4R-2	CPCD30-KU6Y4R-3
		kg		2000	2500	3000	3500	3000
		mm		500	500	500	500	500
		H	mm	3000	3000	3000	3000	3000
		H1	mm	2225	2225	2225	22754375	2225
		H2	mm	4185	4185	4375	4355	4375
		H3	mm	150	150	155	2450	155
		H4	mm	2420	2420	2420	2420	2420
		H5	mm	290	290	290	1263	290
		H6	mm	1263	1263	1263	1263	1263
		H9	mm	450	450	450	450	450
		H13	mm	1092	1092	1282	4224/3159	1282
		(L/L)	mm	4164/3094	4164/3094	4224/3154	4224/3159	4224/3154
		L1	mm	1940	1940	2000	2000	2000
		L2	mm	584	584	589	589	589
		L3	mm	540	540	575	575	575
		W1	mm	1600	1600	1600	1600	1600
		W3/W2	mm	1250	1250	1250	1560/250	1250
		W5	mm	1560/250	1560/250	1560/250	1560/250	1560/250
		r	mm	3513	3513	3585	3585	3585
		r '	mm	1295	1295	1295	1295	1295
		Ra	mm	5589	5589	5589	5589	5589
		α/β	deg.	10/12	10/12	10/12	10/12	10/12
		(L4xWxT)	mm	1070 × 122 × 40	1070 × 122 × 40	1070 × 125 × 45	1070 × 125 × 50	1070 × 125 × 45
19								
			km/h	19	19	19	19	24
			km/h	18	18	18	18	23
			%	75	70	65	66	6 3 70 ×
			%	40	38	38	38	
			kN	32	35	35	38	78p 50
			kN	50	50	50	50	2160/2150
		/	mm/s	504/510	504/510	510/560	420/450	
		/	mm/s	470/430	470/430	510/550	455/490	
30								
			kg	4850	5050	5400	5700	505
			kg	5480/1370	6310/1240	6950/1450	7850/1400	1 ž ž ž ů
			kg	1940/2910	2160/2890	2300/3100	2400/3350	
305636								
			V/Ah					
			kW/rpm					
			Nm/rpm					



1.01						
1.02				CPCD40	CPCD45	CPCD50
1.03		kg		4000	4500	5000
1.04		mm		600		
1.05						
1.06						
2.01		H	mm	3000	3000	3000
2.02		H1	mm	2380		
2.03		H2	mm	4380		
2.04		H3	mm	150		
2.05		H4	mm	2580		
2.06		H5	mm	320		
2.07		H6	mm	1208		
2.08		H9	mm	690		
2.09	/	(L/L)	mm	4660/3440		
2.10		L1	mm	2150		
2.11		L2	mm	685		
2.12		L3	mm	605		
2.13		W1	mm	2050/1980		
2.14	/	W3/W2	mm	1650		
2.15	/	W5	mm	1340/300		
2.16		r	mm	4520		
2.17		Ra	mm	6440		
2.18	/	α/β	deg.	10°/12°		
2.19		(L4xWxT)	mm	1220x155x50		
3.01	/		km/h	30		
			km/h	28		
3.02	/		%	45		
3.03	/		kN	60		
3.04	/	/	mm/s	500/550		
3.05	/	/	mm/s	450/400		
4.01		kg		7450 7550	7800 7900	8100 8200
5.01	X= /			2X/2		
5.02	/					
5.03	/			385/65-22.5-16TL/12-16.5-10-TL		
5.04				-		
5.05						

V3307	+	+DOC+DPF+EGR	CPCD40-50-KU4Y4(2)R-3-06	12/95	55.4/2200	335/1400	3.33	4-94 × 120	/ /
V35-88C41498	+	+DOC+DPF+EGR	CPCD40-50-QC13Y4(2)R-3-6	12/95	65/2200	350/1800	3.47	4-98 × 115	
4C6-88C31498	+		CPCD40-50-QC7Y4(2)R-3-06	12/95	65/2200	350/1800	3.47	4-98 × 115	
S6S-T	VE	+	CPCD40-50-M1Y2R-3-06	2 × 12/80	63.9/2300	285/1700	4.996	6-94 × 120	A

	mm	500mm kg			mm		kg			° α/β
		4t	4.5t	5t			4t	4.5t	5t	
M260	2600	4000	4500	5000	2200	150	7716	8066	8386	10/12
M270	2700	4000	4500	5000	2250	150	7728	8078	8398	10/12
M300	3000	4000	4500	5000	2400	150	7762	8112	8432	10/12
M330	3300	4000	4500	5000	2550	150	7796	8146	8466	10/12
M350	3500	4000	4500	5000	2650	150	7819	8169	8489	10/12
M370	3700	4000	4500	5000	2750	150	7842	8192	8512	10/12
M400	4000	4000	4500	5000	2950	150	7931	8281	8601	10/12
M425	4250	4000	4500	5000	3075	150	7951	8301	8621	10/12
M450	4500	4000	4500	5000	3200	150	7980	8330	8650	10/12
M475	4750	3500	4000	4250	3325	150	8009	8359	8679	10/12
M500	5000	3200	3600	4000	3450	150	8036	8386	8706	10/6
M550	5500	2900	3200	3600	3700	150	8142	8492	8812	10/6
M600	6000	2600	3000	3300	3950	150	8198	8548	8868	10/6

	mm	500mm kg			mm		kg			° α/β
		4t	4.5t	5t			4t	4.5t	5t	
ZM261	2610	4000	4500	5000	2240	900	7812	8162	8482	10/12
ZM271	2710	4000	4500	5000	2290	950	7827	8177	8497	10/12
ZM300	3000	4000	4500	5000	2435	1095	7762	8112	8432	10/12
ZM330	3300	4000	4500	5000	2585	1245	7913	8263	8583	10/12
ZM350	3500	4000	4500	5000	2685	1345	7942	8292	8612	10/12
ZM375	3750	4000	4500	5000	2/ ä ş	1470	7978	8328	8648	10/12
ZM400	4000	4000	4500	5000		1595	8035	8385	8705	10/12
ZM450	4500	3700	4200	4500		1845	8107	8457	8777	10/12
ZM500	5000	3200	3600	4000		2095	8177	8527	8847	6/6
ZM550	5500	2900	3200	3600		2345	8296	8646	8966	6/6
ZM600	6000	2600	3000	3300		2595	8345	8695	9015	6/6



- 1 LCD
- 2 CAN
- 3 IP66
- 4 -30 75 -40 85
- 5
- 6 20 6
- 7
- 8
- 9
- 10
- 11 GPS

